



MULTOTEC

Hi-Flow Screening Systems

The new Hi-Flow screening system offers you:
Maximum screen surface area available for apertures. High open area • high throughput • high efficiency. Custom designed 'T' section runners for easy retro-fitting. 'H' sleeve guarantees secure panel attachments. Knock through pin option for easy panel replacement. Strong internal frame eliminates panel distortion. Aperture sizes and open area to suit your application. Made from abrasion resistant polyurethane. Interchangeable with other modular screen systems.

Hi-Flow Screening Systems

18mm
DIAMETER
H-SLEEVE



Easy to install
(23mm diameter
hole between the
panels, 18mm
hole in runner).

23mm
DIAMETER
H-SLEEVE



Interchangeable
with standard
screen panels.

STANDARD
PIN



Head acts as a
deflector.
Remove from the
top.

KNOCK
THRU
PIN




Head acts as a
deflector, easy to
remove by
knocking the
shaft through the
runner.


KNOCK
THRU
SHAFT




Flush with panel,
no splashing of
material.

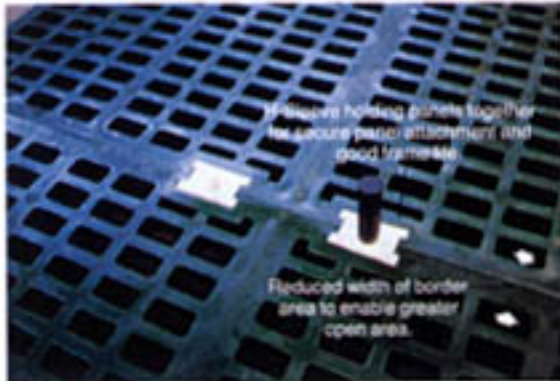


Replaceable huckbolted runner frame

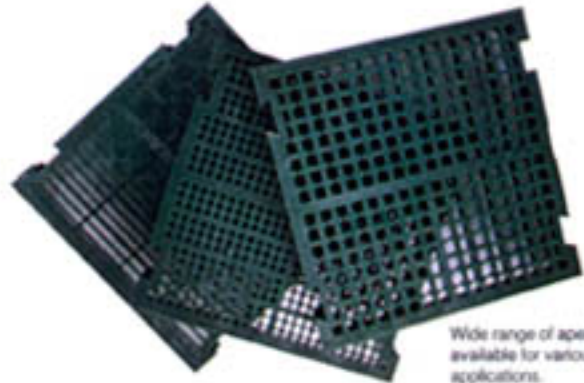

or welded runner frame for lower costs.

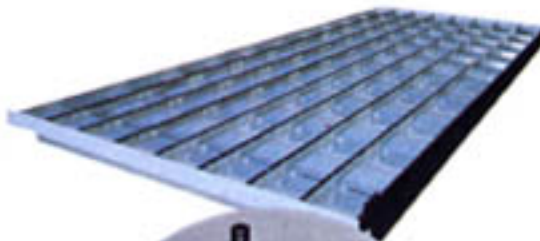


Narrow Runner

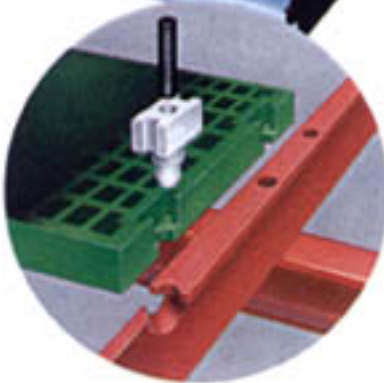


25mm wide
runner to
guarantee no
steel
protrudes
under the
apertures.

OR Thick-thin runner

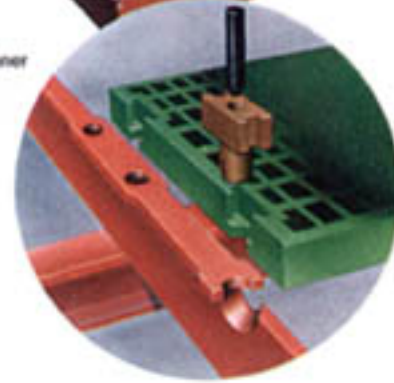

Thick-thin
runner for
strength,
25mm sections
under panel
borders and
35mm sections
under pinching
areas.

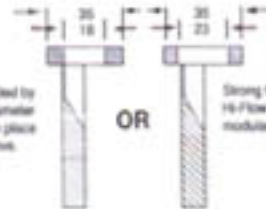

Frame tie can be extended by
drilling hole to 23mm diameter
when wear starts to take place
and using 23mm H-Sleeve.

Strong frame able to accommodate
Hi-Flow panels and standard
modular panels.

MULTOTEC
MANUFACTURING (PTY) LTD.
REG. NO. 890303697

P.O. BOX 224 KEMPTON PARK 1620
☎ (011) 975-8160, ☎ 7-42459, FAX (011) 394-8701/394-5099
28 FORGE RD. SPARTAN INDUSTRIAL TOWNSHIP KEMPTON PARK 1620
SOUTH AFRICA
INTERNATIONAL TEL: (27) 11-975-8160, FAX: (27) 11-394-8701/394-5099